

Example name: Dr. David Suzuki Public School

Template completed by: Constantinos Vassiliades,

vassiliades.constantinos@ucy.ac.cy

For installations

BISTS Location: Windsor, Ontario, Canada,

42°17'N 83°00'W
Climate Type: Dfa
Building Use: Education

Level of BISTS integration 2. Added to the design

 $\sqrt{}$ New Build O Refurbishment

O Other:

tick all that apply

Photographs





Type of BISTS:

Active/Passive/Hybrid delete as appropriate

Function(s):

- √ Air heating
- O Water heating
- O Combi-system
- O Cooling/ventilation/shading
- O PV/T
- O linked to another system

(e.g., heat pump)

O Other:


tick all that apply

Building element:

√ FacadeO RoofO Other:

tick all that apply

Drawings/Sketches/Cross-sections

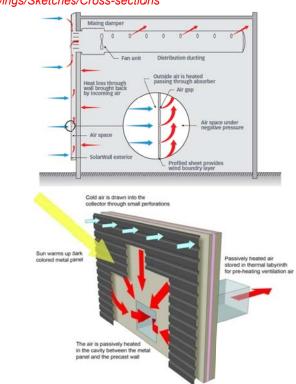

BISTS characteristics:

The 16 m² SolarWall system is located on the south oriented outer wall of the second level of the building. The solar system was integrated seamlessly to the innovative facade. A pipeline connection from one of the air handling units, gathers the outside air and leads it into the SolarWall system where it is preheated using the sun, before entering the air conditioner unit during the heating season.





Stage of Development: Responsible: Company.		
O Idea/Patent O Prototype O Demonstration O Integral building element √ Commercially available tick all that apply	SolarWall	
BISTS description and context		
It is basically a second shell which is mounted on the outer walls of the building, and heats the air and then leads it inside the building.		
System viability		
System viability		
Modelling and simulation tools developed/used		
	reated for established simulation programs, stand-alone model outcomes, validation and accuracy. Design tools	



BISTS Performance data	Graphs for collector efficiency, seasonal energy gains, diurnal/seasonal solar fraction, etc.
Paged on:	diumai/seasonai solai fraction, etc.
Based on: O Estimation	
O Detailed simulation	
CANMET's monitoring report.	
O Measurement/testing	
O Long-term monitoring	
tick all that apply	
Performance parameters	
For integrated systems: key performance indicators -	
Solar savings fraction: %	
Light transmittance: %	
Solar transmittance:% Total solar energy transmittance: %:	
Solar heat gain factor: %	
Building fabric U-values: W/m²K	
Noise, fire, etc ratings	
Other:	
_ , , , ,	
For separate collectors:	
performance rating coefficients - (EN12975, a0,a1,a2), ASHRAE, etc	
(EN 12975, au,a1,a2), ASTINAE, etc	
Other:	
Additional information:	
Sources and references:	
http://colonwall.com/modia/download_collary/SolorMoll EED_Sollahoot adf	
http://solarwall.com/media/download_gallery/SolarWallLEED_Sellsheet.pdf http://solarwall.com/media/download_gallery/SolarWall_SellSheet.pdf	
http://solarwall.com/media/download_gallery/cases/DrDavidSuzukiPublicSchool_SolarWallCase	
Study Y10.pdf	
· 	



INSTRUCTIONS

Please fill in as much information as possible.

Tick where appropriate.


Text in red is suggested guidance. Insertinformation in provided space, removing red text as appropriate

If possible, use metric values.

If necessary, supply additional information on separate sheets

Reference listing

Köppen climate classification

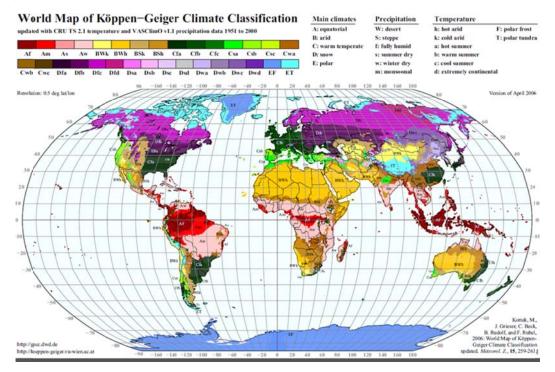

(Kottek, M.,J. Grieser, C. Beck,B. Rudolf, and F. Rubel,2006: World Map of Köppen-Geiger Climate Classificationupdated. Meteorol. Z., 15, 259-263.)

Reijenga classification

The integration of PV systems in architecture can be divided into five categories:

- 1. Applied invisibly
- 2. Added to the design
- 3. Adding to the architectural image
- 4. Determining architectural image
- 5. Leading to new architectural concepts.

(Reijenga, TH and Kaan, HF. (2011) PV in Architecture, in Handbook of Photovoltaic Science and Engineering, Second Edition (eds A. Luque and S. Hegedus), John Wiley & Sons Ltd, Chichester, UK)

BISTS Examples



Rush classification

The architectural/visual expression of building services systems are identified as:

Level 1. Not visible, no change

Level 2. Visible, no change

Level 3. Visible, surface change

Level 4. Visible, with size or shape change

Level 5. Visible, with location or orientation change

(Rush, RD. (1986) The Building systems integration handbook Wiley, New York, USA)

Collector test standards

BS EN 12975-2 2006 'Thermal solar systems and components solar collectors - Part 2 test methods'

ASHRAE Standard 93-2010 'Methods of Testing to Determine the Thermal Performance of Solar Collectors'

ASHRAE Standard 95-1987 'Methods of Testing to Determine the Thermal Performance of Solar Domestic Water Heating Systems'